Vickers®


Relief Valves



Balanced Piston Type Relief & Sequence Valve

CG-06-*-(V)(Y)-40

Model	Spring	Spring	Spring	Pressure Range PSI	Cover S/A Includes Parts Marked ▲
CG-06-B-40	. <u> </u>	2077	- ▲2280	125-1000	942037
CG-06-BY-40					ı
CG-06-BV-40	184458	2077			942037
CG-06-BVY-40					_
CG-06-C-40	I		▲ 2282	500-2000	942038
CG-06-CY-40					_
CG-06-CV-40	184458	2077			942038
CG-06-CVY-40					1
CG-06-F-40	I		_ ▲ 2281	1500-3000	942039
CG-06-FY-40					-
CG-06-FV-40	184458	2077			942039
CG-06-FVY-40					_

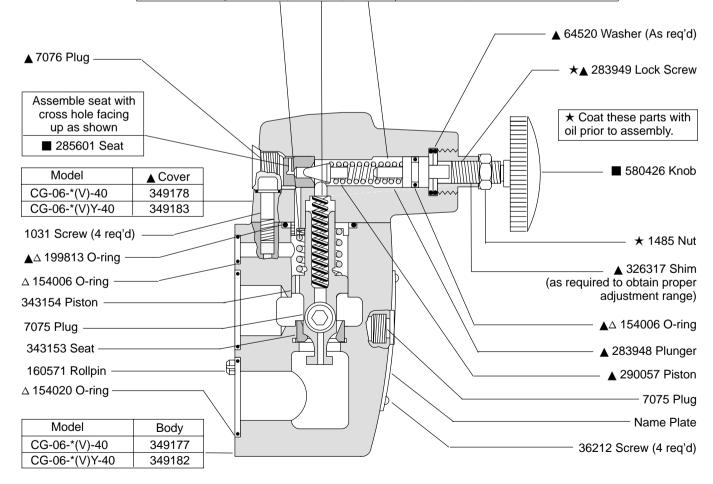

NOTE

Two additional 154006 O-rings are required in models CG-06-*(V)Y-40. These are included in Seal Kit.


△ Included in 919417 Seal Kit

Equivalent F3 Seal Kit 919444



Released 11–1–85

Model Code Breakdown



- Model Series
- CG Relief valve, gasket mounted
- 2 Size
- **06** 3/4 inch

- 3 Pressure Range
- **B** 125-1000 PSI
- **C** 500-2000 PSI
- F 1500-3000 PSI
- 4 Vent Pressure
- **V** High vent pressure (Omit for standard vent pressure.)

- **5** External Drain Feature
- Y Sequence valve (Omit for standard relief.)
- 6 Design