Vickers®


Relief Valves



Remote Electrically Modulated Relief Valves

CGE-06-1-22 CGE-06-3(V)-22-(S6)(S7)




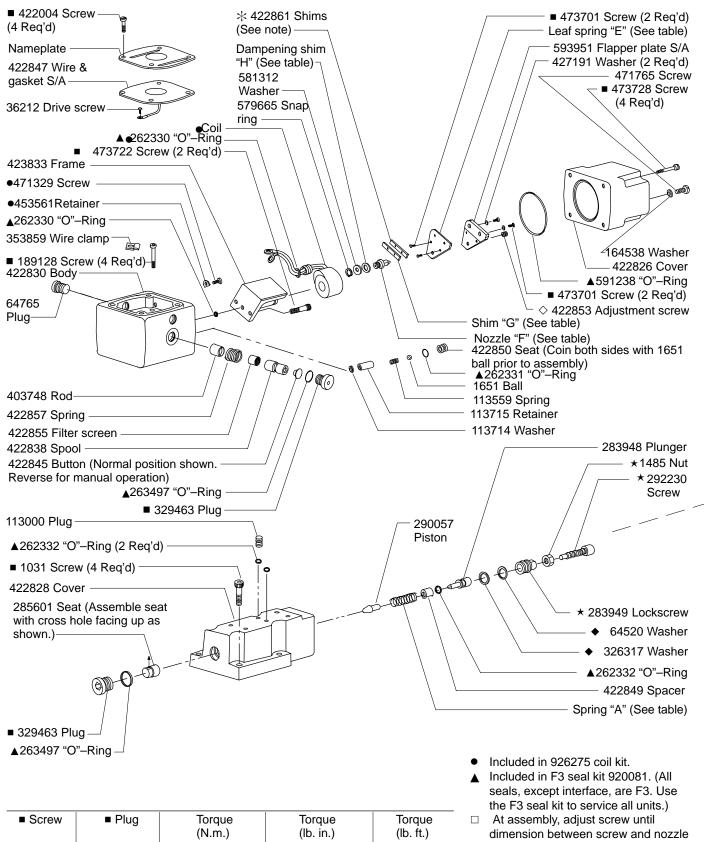


■ Screw	■ Plug	Torque (N.m.)	Torque (lb. in.)	Torque (lb. ft.)
1031		12.6 Max.	112 Max.	
189128		4.7 Max	42 Max	
	329463	40.7 – 47.5	360 – 420	30 – 35
	343740	14.7 – 18.1	130 – 160	
422004		0.7 - 0.9	6 –8	
473701		1.4 – 1.6	12 – 14	
473722		4.0 – 4.5	35 – 40	
473728		4.0 – 4.5	35 – 40	

© Eaton Hydraulics, Incorporated 2000 All Rights Reserved


- is .004 .005 in. or 0.10 0.13 mm.
- Included in Screw/Plug/Nozzle Torque tables.
- $\,\,st\,$ Number of shims are factory selected to obtain maximum pressure setting.
- Not available for sale
- Coat with oil prior to assembly
- Arrange for correct pressure adjustment range






■ Nozzle "F"	Torque (lb. in.)	Torque (N.m.)		
424189	11–13	1.2–1.5		
422842	13–15	1.5–1.7		

Model	Pressure range	Spring "A"	Spring "B"	Spring "C"	Leaf spring "E"	■ Nozzle "F"	Shim "G"	Damping shim "H"
CGE-06-1-22	75–1000 psi	2280	2077		424188	424189	424190	424724
CGE-06-3-22	150–3000 psi	2281	2077		422835	422842	422839	
CGE-06-3V-22	300–3000 psi	2281		184458	422835	422842	422839	

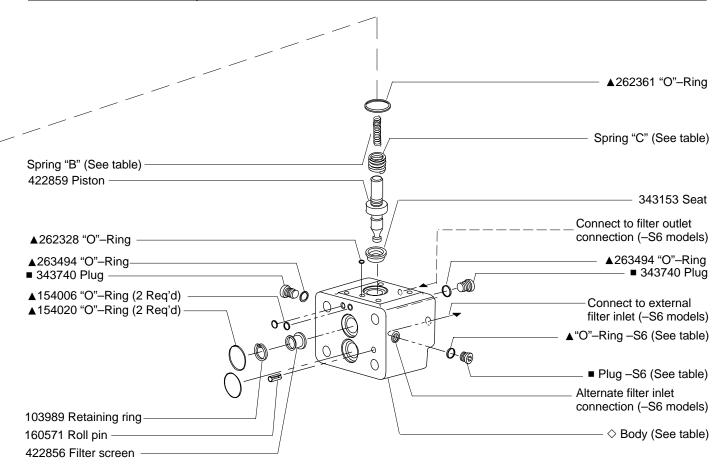

Model	◇ Body	▲ "O"-Ring	▲ Plug	External 3000 PSI 35 micron filter Req'd
CGE-06-**-22	597718			No
CGE-06-**-22-S6	597831	263494	343740	Yes

Model Code



- 1 Viton seals (Omit if not required)
- **06** 60 series (3/4" NOM.)

5 Valve size

2 Relief valve

6 Pressure rating (psi)

- 3 Subplate mounted
- **1** 75 1000 (70 bar) **3** – 150 – 3000 (210 bar) **3V** – 300 – 3000 (210 bar)
- 4 Remote electrically modulated

feature. Omit if not required. (for 3000 psi (210 bar) pressure models only)

7 "V" - Optional high venting pressure

- 8 Design
- 9 **S6** External 35 micron pilot filter. (Furnished by customer)
 - **S7** Viton seals with 35 micron filter (Early models)